

Overview

- Most secure object detection due to the barrier principle
- Manipulation-proof, simple teach-in via qTeach or line teach
- IO-Link for extended parameterization options and additional diagnostic data
- Robust housing with stainless steel spacer sleeves



Picture similar



Technical data

General data		Electrical data	
Type	Through beam sensor	Output circuit	Push-pull
Emitter / receiver	Receiver	Output current	< 50 mA
Light source	Use with pulsed red laser diode	Short circuit protection	Yes
Actual range Sb	5 m	Reverse polarity protection	Yes
Nominal range Sn	6 m	Communication interface	
Smallest object recognizable typ.	3 mm (0,5 mm with aperture)	Baud rate	230,4 kBaud (COM 3)
Alignment / soiled lens indicator	Flashing output indicator	Adjustable parameters	Switching point Time filters LED status indicators Output logic Counter Deactivate the sensor element Find Me function Teach-in mode
Output indicator	LED yellow	IO-Link port type	Class A
Power on indication	LED green	Process data length	32 Bit
Sensitivity adjustment	Teach-in and IO-Link	Process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
Suppression of reciprocal influence	Yes	Interface	IO-Link V1.1
Electrical data		Additional data	Signal strength Excess gain Operating cycles Device temperature
Response time / release time	< 0,1 ms < 0,12 ms	Cycle time	≥ 0,6 ms
Jitter	< 0,03 ms < 0,05 ms		
Voltage supply range +Vs	10 ... 30 VDC		
Current consumption max. (no load)	20 mA (@ 10 VDC)		
Current consumption typ.	10 mA (@ 24 VDC)		
Voltage drop Vd	< 2 VDC		
Output function	Light / dark operate		

O200.EL-GW1J.72NV/FREC

Through beam sensors - miniature

Article number: 11224792

Technical data

Mechanical data

Width / diameter	8 mm
Height / length	25,1 mm
Depth	14,1 mm
Type	Rectangular
Mechanical mounting	Sleeve smooth (stainless steel)
Housing material	Plastic (ASA, PMMA)


Mechanical data

Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0,08 mm ²


Ambient conditions

Operating temperature	-25 ... +50 °C
Protection class	IP 67


Dimension drawing

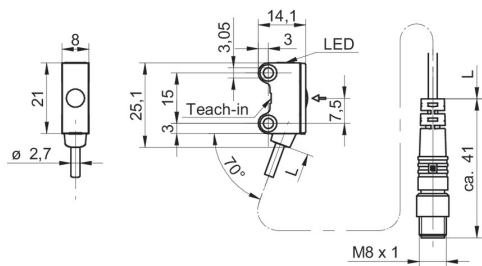

Excess gain curve

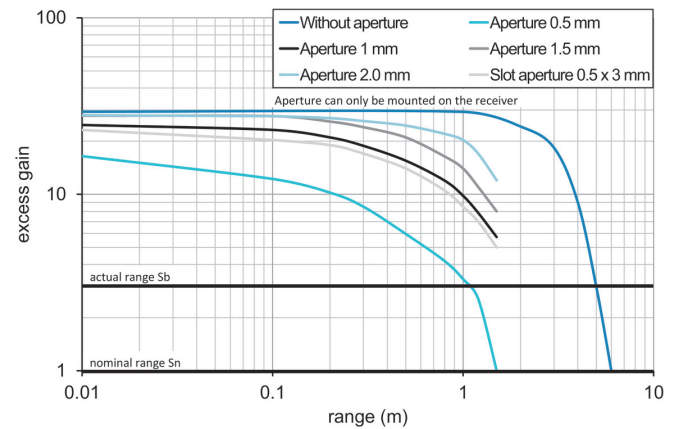

Connection diagram

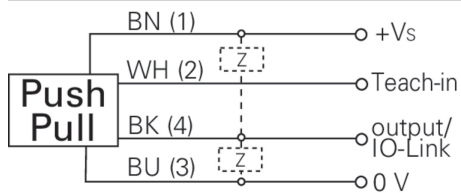

Pin assignment

